



MATCO
solutions qui adherent • solutions that bond

Technical Data Sheet


7054

Acrylic Core Tape



Product Description

tesa® 7054 is an acrylic core tape suitable for constructive and permanent bonding of transparent materials. Its acrylic core compensates for different thermal elongation of bonded parts. It also offers a high immediate tack and peel adhesion.

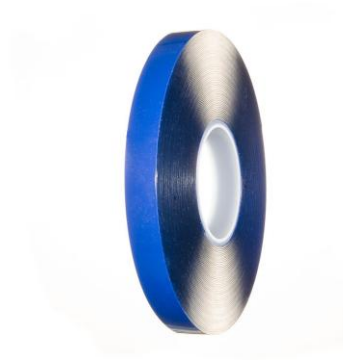

Available in clear with blue filmic liner.

Main Applications

- Bonding of transparent and translucent materials
- Deco glass panels industry
- Sign manufacturing industry
- Partition walls industry

Product Information

Backing	Thickness (mil)	Adhesion to steel (oz/in)	Adhesive Type
Solid Acrylic	20	173.6	Acrylic
Operating Temp. Range (°F)	Short Term Temp. Resistance (°F)	Elongation at Break (%)	
≤212	392	1000	

Application and Storage

Note: The physical and performance characteristics shown are averages obtained from tests performed according to ASTM and PSTC test methods. Matco can make no warranty of any kind as to the results of the adhesive product use. The information published here is representative of laboratory research on these products and is believed to be reliable. Values should not be used for specification purposes. Each user should make their own test to determine the products suitability for their own intended use and shall assume all risks and liabilities in connection therewith. Materials should be stored at 70°F (21°C) with 50% relative humidity.



Rev. 01/06/2016