


# 7055

Acrylic Core Tape



## Product Description

tesa® 7055 is an acrylic core tape offering high bonding power, high stress dissipation and resistance to different temperatures and weather. It is suitable for constructive bonding of transparent and translucent materials. Its acrylic core compensates for different thermal elongation of bonded parts.

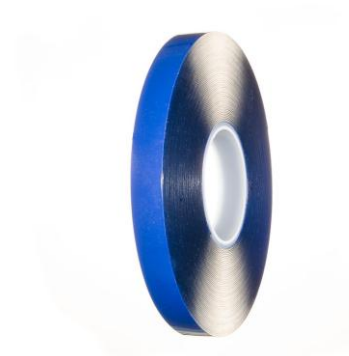

Available in clear with blue filmic liner.

## Main Applications

- Bonding of transparent and translucent materials
- Deco glass panels industry
- Sign manufacturing industry
- Partition walls industry

## Product Information

<b>Backing</b>	<b>Thickness (mil)</b>	<b>Adhesion to steel (oz/in)</b>	<b>Adhesive Type</b>
Solid Acrylic	40	219.3	Acrylic
<b>Operating Temp. Range (°F)</b>	<b>Short Term Temp. Resistance (°F)</b>	<b>Elongation at Break (%)</b>	
≤212	392	1000	

## Application and Storage

Note: The physical and performance characteristics shown are averages obtained from tests performed according to ASTM and PSTC test methods. Matco can make no warranty of any kind as to the results of the adhesive product use. The information published here is representative of laboratory research on these products and is believed to be reliable. Values should not be used for specification purposes. Each user should make their own test to determine the products suitability for their own intended use and shall assume all risks and liabilities in connection therewith. Materials should be stored at 70°F (21°C) with 50% relative humidity.